

WG26 Output/input





## **Product Description**


Two relays, supports up to 2000 users in total for two zones Have 7 working modes

- 1. Wiegand reader
- 2. Standalone for single door
- 1. Standalone for two doors
- 2. With external reader for two doors
- 3. Two units interlocked for two doors
- 4. Anti-passback for single door
- 5. Anti-passback for two doors.

Waterproof structure design, fit for IP68 waterproof degree Digital backlit keypad, the backlit can be set to Normal ON, Normal OFF, or Human-approach

Can add consecutive user cards quickly in one time



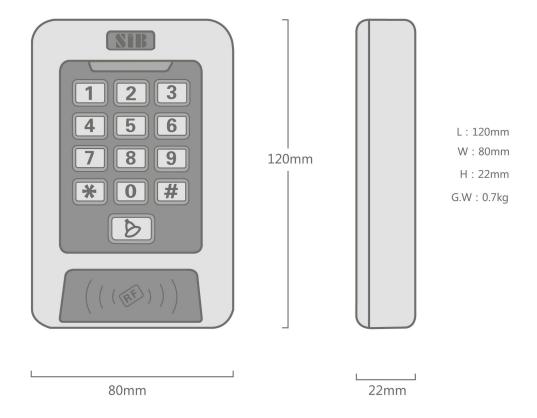

## **Technical parameters:**

Card type: EM.HID

Waterproof degree: IP68

Environment Humidity: 10%~90%

lock output : ≤3A

Working voltage: DC12V±10%

Static electricity : ≤30mA

Alarm output : ≤20A

Output short circuit protection time :  $\leq 100 \mu S$ 

Card read distance: 5 ~ 8cm

Ambient temperature : -45°C ~ 60°C

Door Opening Time: 0∼99s(Adjustable)

Dimension: 120 \*80\*22mm