


Platinum HD-TVI Dome Camera 5MP CMHD7352-28



Key Features:

- 5MP High Definition
- 2560x1944@20fps
- 2.8mm Fixed Lens
- 2 Matrix IR up to 65ft(20m)
- DC 12V
- OSD Menu via UTC technology with Platinum TVI DVR
- IP67, IK10

Dimensions:

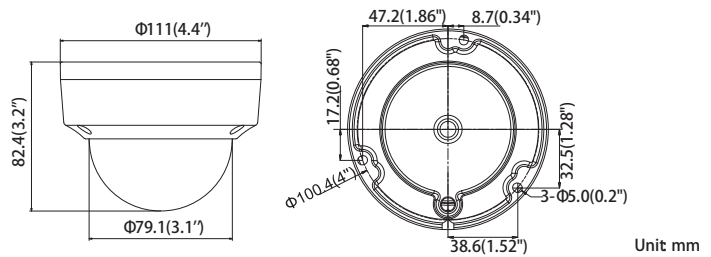

Platinum HD-TVI Dome Camera 5MP CMHD7352-28

| CAMERA | |
|-------------------------------|--|
| Image Sensor | 1/2.7"CMOS |
| Signal System | NTSC/PAL |
| Effective Pixels | 2560(H)*1944(V) |
| Min. Illumination | 0.008 Lux, 0 Lux with IR |
| Shutter Speed | 1/30(1/25) s to 1/50,000 s |
| Lens | 2.8mm Angle of View: 91° |
| Day & Night | ICR |
| Synchronization | Internal |
| Video Frame Rate | 2560 x 1944@20fps |
| HD Video Output | 1 HD-TVI Output |
| S/N Ratio | More than 62dB |
| MENU | |
| AGC | Support |
| D/N Mode | Auto/ Color/BW |
| White Balance | ATW/ NWB |
| BLC | Support |
| 3D DNR | Support |
| Language | English, Chinese |
| Functions | Brightness,Sharpness,Digital noise reduction,Mirror,Smart IR |
| GENERAL | |
| Working Temperature /Humidity | -40 ° F - 140 ° F (-40° C - 60 ° C) Humidity 90% or less (non-condensing) |
| Power Supply | DC 12V |
| Power Consumption | Max. 3W |
| Impact Protection | IK10 |
| Weather Proof Ratings | IP67 |
| IR Range | Up to 65ft(20m) |
| Dimension | 4.4 "×3.3" (111.0×82.5 mm) |
| Weight | 0.8lb(350g) |