


Platinum HD-TVI Fisheye Camera 5MP CMHD7552F



Key Features

- HD 5MP Video Output
- Adopt HDTVI Technology
- Built-in microphone
1-ch audio output,
- Multiple Display Mode

Dimensions:

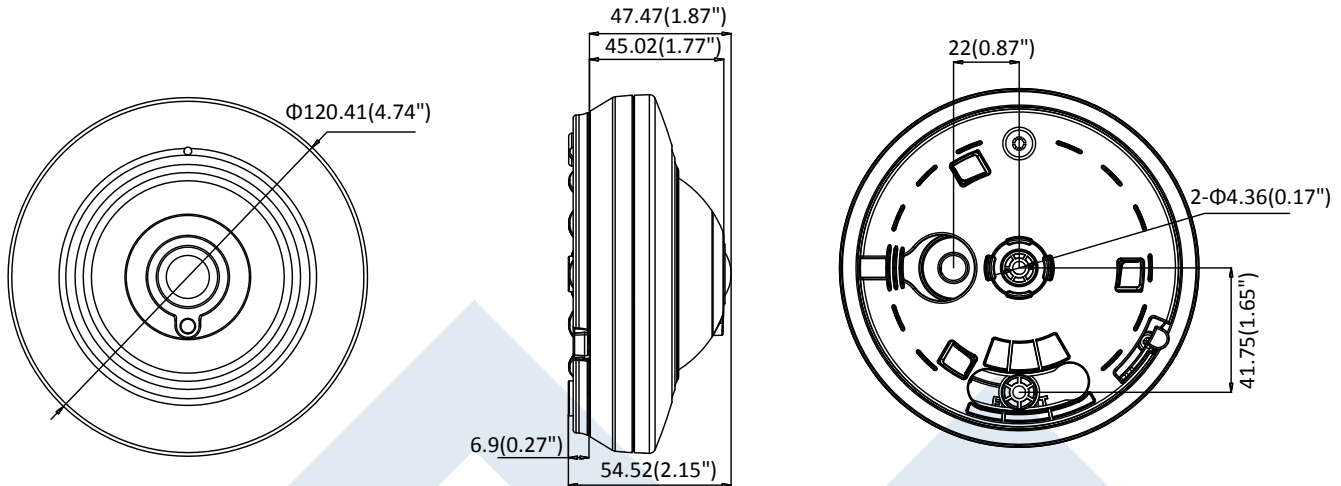

unit:mm

Platinum HD-TVI Fisheye Camera 5MP CMHD7552F

CAMERA	
Image Sensor	5.0MP progressive scan CMOS
Signal System	NTSC/PAL
Resolution	2592 (H) × 1944 (V)
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Speed	1/12.5s to 1/20,000s
Lens	1.1mm Fisheye
Day & Night	ICR
Synchronization	Internal
Video Frame Rate	5Mega@12.5fps
HD Video Output	1 HD-TVI Output
Audio In	Built-in Mic
Audio Out	1-ch, BNC Output, (Output Impedance: 1KΩ)
Angle Adjustment	Pan: 0° -30° ; Tilt: 0° ; Rotate: 0°
MENU	
Ceiling Mounting Display Mode	Default, Panorama, 4 PTZ, Fisheye & 3 PTZ, Annular, Mini-fisheye & 1 PTZ, Annular & 2 PTZ
Wall Mounting Display Mode	Default, Panorama, 4 PTZ, Fisheye & 3 PTZ, Panorama & 3 PTZ
D/N Mode	Color/BW/AUTO
Language	English
Function	Brightness, Contrast, Saturation
GENERAL	
Working Temperature /Humidity	-4° F - 140° F (-20° C - 60° C) Humidity 90% or less (non-condensing)
Power Supply	DC 12V
Power Consumption	Max. 5.5W
IR Range	32ft-65ft(10-20m)
Dimension	φ4.74" × 2.14" (φ120.4×54.5mm)
Weight	0.77lb(350g)