





Value600E/Value800E/Value1000E
Value1200ELCD/Value1500ELCD/Value2200ELCD



LOCAL SOCKETS FOR SOHO APPLICATIONS



The GreenPower UPS providing trustworthy power protection with built-in Automatic Voltage Regulation for home and SOHO

Ideal for home, SOHO office, office and back office applications, the Value SOHO Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. This series features local sockets for connections with PCs, laptops, and printers, etc. The included RJ11/RJ45 port can provide data line protection against surge and spike. The products' power management software achieves real-time monitoring and configuration.

APPLICATION

- Home
- Office
- SOHO Office
- Back Office

SERIES FEATURES



- Line-interactive UPS Topology
- Automatic Voltage Regulation (AVR)
- Surge and Spike Protection
- LCD Status Display*
- Tower Form Factor
- Energy Saving Technology
- Overload Protection
- Phone/Fax/Modem/DSL/Network Protection
- PowerPanel® Management Software

*Selected Model(s)

PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. LCD Display Panel
4. Function Button(s)
5. Battery Backup & Surge Protected Outlets
6. Communication Protection Ports RJ11/RJ45
7. Input Circuit Breaker

8. AC Inlet
9. USB Port
10. Serial Port

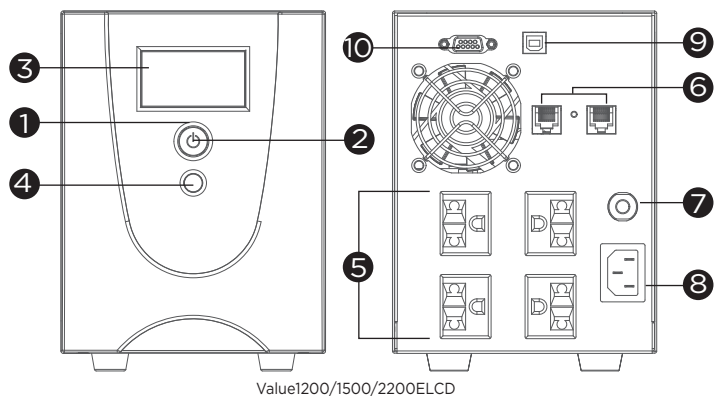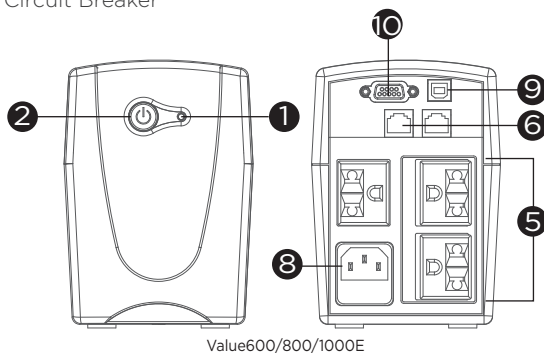



TECHNICAL SPECIFICATIONS

| Model Name | Value600E | Value800E | Value1000E | Value1200ELCD | Value1500ELCD | Value2200ELCD |
|--------------------------------------------------|------------------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| General | | | | | | |
| UPS Topology | Line-interactive | Line-interactive | Line-interactive | Line-interactive | Line-interactive | Line-interactive |
| Energy Saving Technology | GreenPower UPS™ Bypass Technology | | | | | |
| Input | | | | | | |
| Nominal Input Voltage (Vac) | 230 ± 10% | 230 ± 10% | 230 ± 10% | 230 ± 10% | 230 ± 10% | 230 ± 10% |
| Input Voltage Range (Vac) | 165 - 280 | 165 - 280 | 165 - 280 | 165 - 280 | 165 - 280 | 165 - 280 |
| Input Frequency (Hz) | 50 ± 5, 60 ± 5 | 50 ± 5, 60 ± 5 | 50 ± 5, 60 ± 5 | 50 ± 5, 60 ± 5 | 50 ± 5, 60 ± 5 | 50 ± 5, 60 ± 5 |
| Input Frequency Detection | Auto-sensing | Auto-sensing | Auto-sensing | Auto-sensing | Auto-sensing | Auto-sensing |
| Rated Input Current (A) | 2.72 | 3.64 | 4.55 | 5.45 | 6.82 | 10 |
| Input Connector Type | IEC C14 | IEC C14 | IEC C14 | IEC C14 | IEC C14 | IEC C14 |
| Output | | | | | | |
| Capacity (VA) | 600 | 800 | 1000 | 1200 | 1500 | 2200 |
| Capacity (Watts) | 360 | 480 | 550 | 720 | 900 | 1320 |
| On Battery Waveform | Simulated Sine Wave | Simulated Sine Wave | Simulated Sine Wave | Simulated Sine Wave | Simulated Sine Wave | Simulated Sine Wave |
| On Battery Voltage(s) (Vac) | 230 ± 10% | 230 ± 10% | 230 ± 10% | 230 ± 10% | 230 ± 10% | 230 ± 10% |
| On Battery Frequency (Hz) | 50 ± 1%, 60 ± 1% | 50 ± 1%, 60 ± 1% | 50 ± 1%, 60 ± 1% | 50 ± 1%, 60 ± 1% | 50 ± 1%, 60 ± 1% | 50 ± 1%, 60 ± 1% |
| Automatic Voltage Regulation (AVR) | Single Boost, Single Buck | | | | | |
| Overload Protection | Fuse | Fuse | Fuse | Circuit Breaker | Circuit Breaker | Circuit Breaker |
| Outlet(s) - Total | 3 | 3 | 3 | 4 | 4 | 4 |
| Outlet Type | AS x 3 | AS x 3 | AS x 3 | AS x 4 | AS x 4 | AS x 4 |
| Outlet(s) - Battery & Surge Protected | 3 | 3 | 3 | 4 | 4 | 4 |
| Typical Transfer Time (ms) | 4 | 4 | 4 | 4 | 4 | 4 |
| Battery | | | | | | |
| Runtime at Half Load (min) | 8 | 7 | 7 | 8 | 10 | 7 |
| Runtime at Full Load (min) | 1 | 1 | 1 | 2 | 2 | 1 |
| Typical Recharge Time (Hours) | 8 | 8 | 8 | 8 | 8 | 8 |
| User-replaceable | No | No | No | Yes | Yes | Yes |
| Battery Type | Sealed Lead-acid | Sealed Lead-acid | Sealed Lead-acid | Sealed Lead-acid | Sealed Lead-acid | Sealed Lead-acid |
| Replacement Battery Pack | - | - | - | RBPO084 | RBPO085 | RBPO086 |
| RBP Quantity (pcs) | - | - | - | 2 | 2 | 2 |
| Surge Protection & Filtering | | | | | | |
| Surge Suppression (Joules) | 125 | 125 | 125 | 125 | 125 | 125 |
| EMI/RFI Filtration | Yes | Yes | Yes | Yes | Yes | Yes |
| Phone/Network Protection RJ11/RJ45 (Combo) | 1-in, 1-out | 1-in, 1-out | 1-in, 1-out | 1-in, 1-out | 1-in, 1-out | 1-in, 1-out |
| Management & Communications | | | | | | |
| LCD Panel | - | - | - | Yes | Yes | Yes |
| LED Indicators | Power On, Line Mode, Battery Mode, Low Battery | | | Power On | | |
| HID Compliant USB Port(s) | 1 | 1 | 1 | 1 | 1 | 1 |
| Serial Port | RS232 | RS232 | RS232 | RS232 | RS232 | RS232 |
| Audible Alarms | Battery Mode, Low Battery, Overload, UPS Fault | | | | | |
| Power Management Software | PowerPanel® Personal Edition | | | | | |
| Physical | | | | | | |
| Form Factor | Tower | Tower | Tower | Tower | Tower | Tower |
| Physical Size - UPS Module | | | | | | |
| Dimensions (WxHxD) (mm.) | 100 x 140 x 300 | 100 x 140 x 300 | 100 x 140 x 300 | 140 x 180 x 326 | 140 x 180 x 326 | 140 x 180 x 326 |
| Weight (kg.) | 4.6 | 5.2 | 5.5 | 11.2 | 13.2 | 14.5 |
| Environmental | | | | | | |
| Operating Temperature (°C) | 0 - 40 | 0 - 40 | 0 - 40 | 0 - 40 | 0 - 40 | 0 - 40 |
| Operating Relative Humidity (Non-condensing) (%) | 0 - 90 | 0 - 90 | 0 - 90 | 0 - 90 | 0 - 90 | 0 - 90 |
| Online Thermal Dissipation (BTU/hr) | 99 | 102 | 109 | 167 | 198 | 225 |
| Certifications | | | | | | |
| Certifications* | CE | CE | CE | CE | CE | CE |
| RoHS | Yes | Yes | Yes | Yes | Yes | Yes |

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.