


LTH-D301GY-WIFI-B10

Indoor Station



Key Feature


- UI V2.0: User friendly design
- 10-inch colorful touch screen with resolution 1024 x 600
- Standard PoE
- Remote unlocking via the client or the mobile client
- Views live videos of door and linked cameras
- Supports wireless network and linked cameras

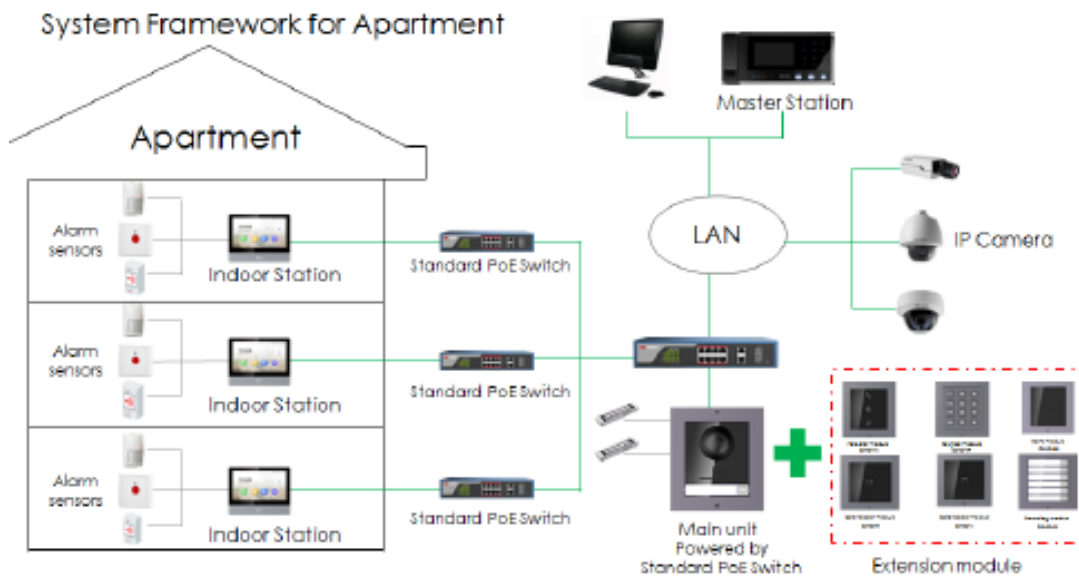

Specification

Model	LTH-D301GY-WIFI-B10	
System	Processor basic frequency	1 G
	Memory	128 MB
	Flash	32MB
Display	Operation system	Embedded Linux operation system
	Display screen	10.1-inch TFT LCD
	Display resolution	1024 × 600
Audio	Operation method	Capacitive touch
	Audio Input	Build-in omnidirectional microphone
	Audio output	Built-in loudspeaker
	Volume	Local or software control
	Audio compression standard	G.711 U
	Audio compression rate	64 Kbps
Network	Audio quality	Noise suppression and echo cancellation
	Wired network	10/100 Mbps self-adaptive network
	Wireless network	Wi-Fi 802.11b/g/n
	Protocol	TCP/IP, SIP, RTSP
Interface	Network interface	1 RJ-45 10/100 Mbps self-adaptive
	RS-485	1
	Alarm input	8 zones alarm input
	Relay output	2
Extended Application	TF card	Support, Max. 32 GB
	Power interface	IEEE802.3af, standard PoE / 12 VDC/1 A
	Mobile client	Support
	Indoor call elevator	Support
General	IPC	Support
	Power supply mode	12v DC /1A
	Power consumption	≤ 6 W
	Working temperature	-10 °C to 50 °C (-14 °F to 122 °F)
	Working humidity	0% to 90%
	Dimensions (W × H × D)	254 mm × 166 mm × 14.7 mm (10.0" × 6.5" × 0.58")

Physical Interface

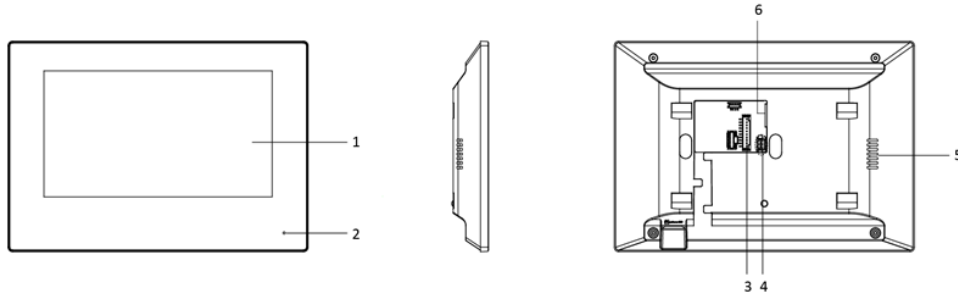

No.	Description
1	Display Screen
2	Microphone
3	Alarm Terminal
4	Power Interface
5	Loudspeaker
6	Network Interface and Power Supply

2020 LTS Security Australia. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon the version or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners