

LTH-M201-DIS **Display Module**



Key Feature

- 3.5" LCD Screen
- Up to 500 Contacts Supported
- 320x480 Resolution
- IP65
- 4 physical buttons easy to use
















Specification

System Parameters	
	Embedded MCU processor
Storage	
Flash	8 Mb
Display Parameters	
	3.5" TFT LCD screen
Resolution	
	Supported
Operation Method	Physical buttons
Interfaces	
Module Connections	2 (1 input, 1 output)
Power Input	12 VDC (from another module)
	12 VDC (from another module)
	4 (up, down, OK, back)
Debugging Port	<u>1</u>
General	
Power Consumption	<u> </u>
Working Temperature	-4° to 140° F (-20° to 140° C)
Working Humidity	10 to 95%
IP Protection Level	
Installation	Flush and surface mounting
Dimensions	3.87" x 3.95" x 1.33" (98.5 mm x 100 mm x 34.2 mm)

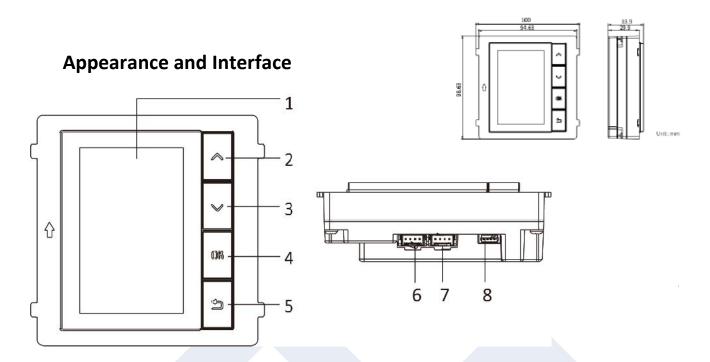

NO	Description	NO	Description
1	Screen	5	Back Button
2	Up Button	6	Module-Connecting Interface (Output)
3	Down Button	7	Module-Connecting Interface (Input)
4	OK Button	8	Debug Port

© 2019 LT Security, Inc. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon the version or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners









