


Network Access Controller

LTK2804

Key Features:

- 32-bit high-speed processor
- TCP/IP network communication, with self-adaptive; network interface. The communication data is encrypted to ensure information security;
- Massive storage with 10 thousand cards information and 50 thousand card swiping records;
- Data can be permanently saved when the access controller is powered off.

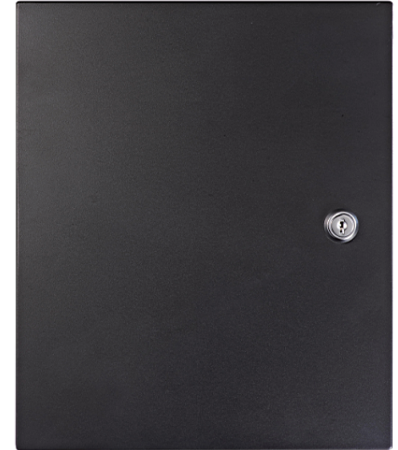

Properties

Working Voltage	AC 100-240V
Power consumption	≤ 3.5W(without load)
Processor	32-bit
Uplink Communication Interface	TCP/IP Network Interface and RS-485 Interface
Downlink Communication Interface	Wiegand interface
Storage	Storage for 10 thousands valid cards information and 50 thousands card swiping records
LED Indicator	Power Supply Status, Communication Status, Abnormal Status
Built-in Clock	Yes
Accessible Card Reader	4 Card Readers (Wiegand Interface) Connectable
Input Interface	Door Magnetic × 4, Door Switch × 4, Case Input × 4
Output Interface	Door Switch Relay × 4, Alarm Relay × 4
Working Temperature	-4° F ~ +149° F (-20° C to +65° C)
Working Humidity	10 % to 90 % (Non-Condensing)
Dimensions (L×W×H)	11.2"x9.3"x2.7"(285mmx237mmx69mm)