

LTN8704-P4/8708-P8/8716-P8


Embedded Plug & Play NVR



Key features

- Third-party network cameras supported
- Up to 6 Megapixels resolution recording
- HDMI and VGA output at up to 1920 × 1080P resolution
- Up to 2 SATA interfaces, up to 6TB for each disk
- Support NAS, IP SAN Network Storage
- 1xPOS(LTN8704-P4), 4xPOS(LTN8708-P8, LTN8716-P8)
- Plug & Play with up to 8 independent PoE network interfaces
- Support network detection, including network delay, packet loss, etc

Rear Panel

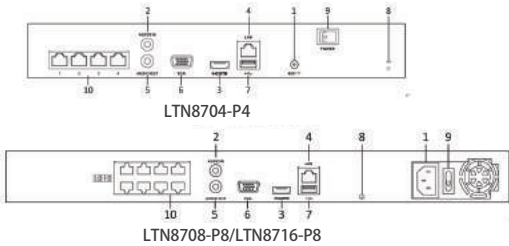

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Power Switch
10. Network Interfaces with PoE Function

	LTN8704-P4	LTN8708-P8	LTN8716-P8
Video/Audio input			
IP video input	4-ch	8-ch	16-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)		
Network			
Incoming bandwidth	40Mbps	80Mbps	160Mbps
Outgoing bandwidth	80Mbps		
Remote connection	128		
Video/Audio output			
Recording resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
Frame rate	Main stream: 50 fps (P) / 60 fps (N)		
	Sub-stream: 50 fps (P) / 60 fps (N)		
HDMI/VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz		
Audio output	1-ch, RCA (Linear, 1kΩ)		
Decoding			
Live view / Playback resolution	6MP/5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
Capability	4-ch	8-ch	16-ch
Hard disk			
SATA	1 SATA interface for 1 HDD	2 SATA interface for 2 HDDs	
Capacity	Up to 6TB for each disk		
External interface			
Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface		
USB interface	1 × USB 2.0 and 1 × USB 3.0		
PoE			
PoE Interface	4 independent 100 Mbps PoE	8 independent 100 Mbps PoE	
Max. Power	50W	120W	
Standard	AF and AT		
Others			
Power supply	48V DC	100 ~ 240 VAC, 47 ~ 63 Hz, 3A	
Consumption (without harddisk)	≤ 10W		
Working temperature	-10 ° C ~ +55 ° C (14° F~131° F)		
Working humidity	10 % ~ 90 %		
Chassis	1U chassis	19-inch rack-mounted 1U chassis	
Dimensions (W × D × H)	315 × 230 × 45mm (12.4 × 9.1 × 1.8 inch)	445 × 290 × 45mm (17.5 × 11.4 × 1.8 inch)	
Weight (without hard disk)	≤ 2 Kg (4.4 lb)	≤ 4 Kg (8.8 lb)	