



**Built To Run  
Continuously**

### Product Feature

- **4K HD Solution**
- **Industrial-grade LED screen, Designed for CCTV.**
- **High brightness, High contrast, High definition.**
- **Latest 3D digital filtering and 3D digital noise reduction technology.**
- **5ms fast response; 178° wide viewing angle;**
- **Metal chassis design, Anti-static, Anti-magnetic field, Anti-interference, no radiation.**
- **Easy Menu; Convenient Controller.**

### DNle digital image processing

Dynamic optimization



Natural color



Contrast enhancement



Detail enhancement



### 4K UHD HD resolution

- UHD Quality
- 3840P/2160P
- 4\*FUHD/8\*HD



## DISPLAY CHARACTERISTICS

Mode Name	MON-28H4K
Screen Size	28"
Active Display Area (mm)	620.93mm(W)× 341.3mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	3840 × 2160
Display Color	1.073G
Pixel Pitch(mm)	0.1617(H)×0.1617(V)
Brightness(nits)	350cd/m <sup>2</sup>
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

## INPUT&OUTPUT

HDMI 2.0	1
DP	1
USB	1
Power	1
Speaker	2x3W(Stereo)

## VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Support Picture in Picture (PIP)	YES

## POWER&Mount Way


Power	AC100V~240V,50/60Hz
Working Temperature	-30 to +85 °C
Power Consumption	≦40W
Menu	Chinese/English(other languages supported)
Mounting/Weight	VESA mount/7kg
MTBF	50000Hours

## ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

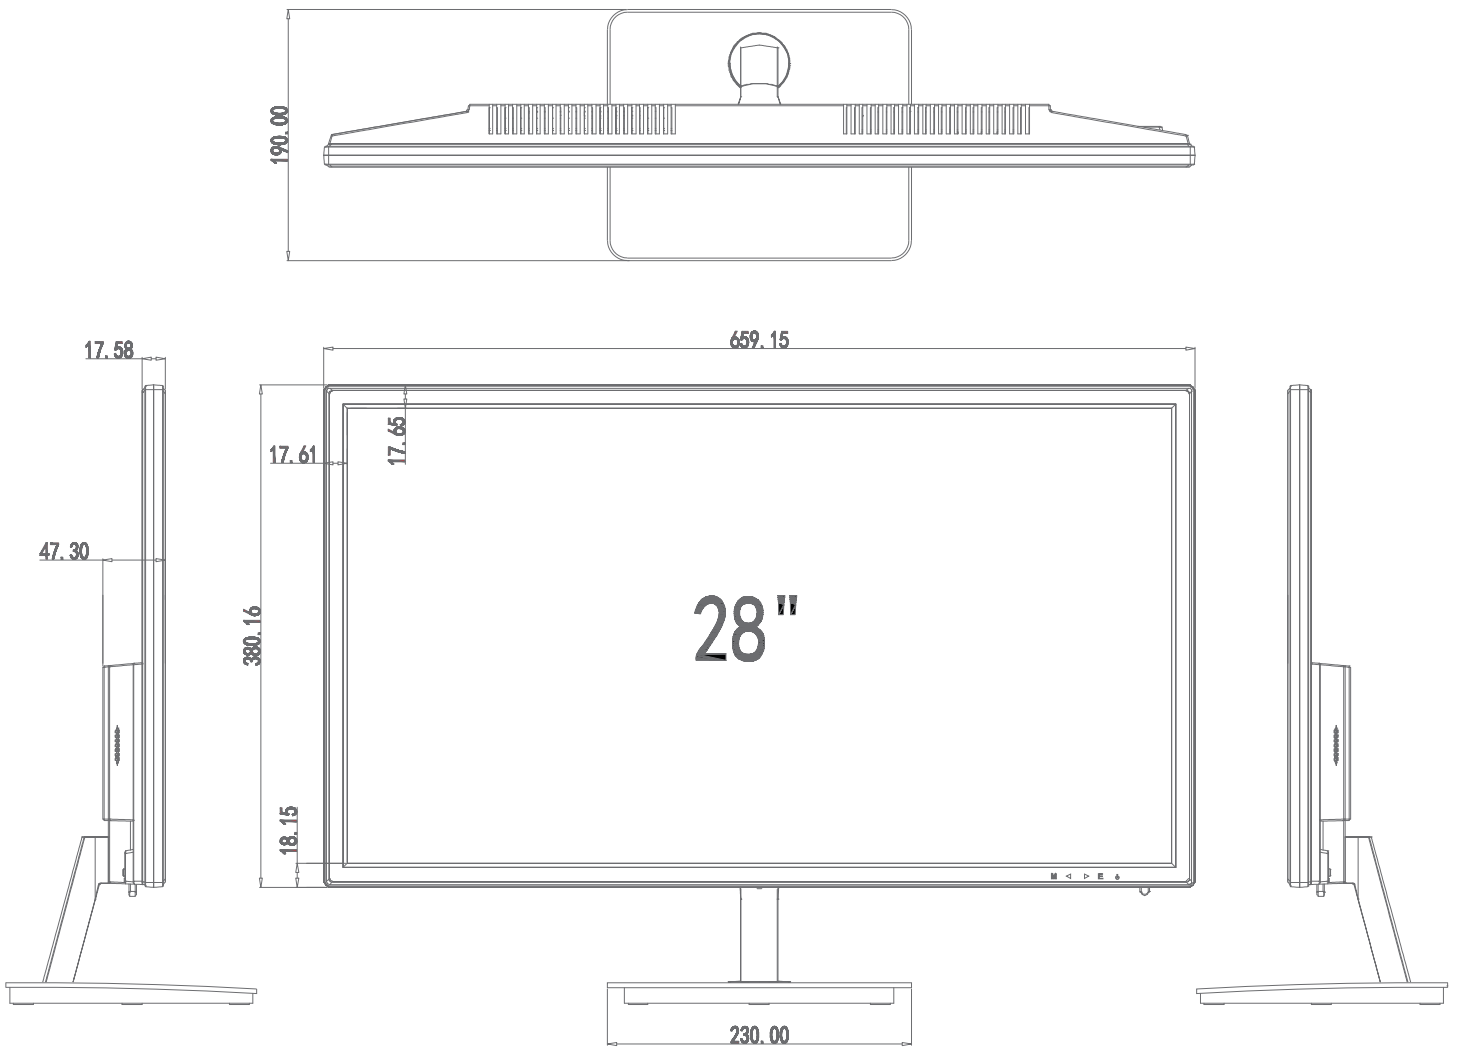

Unit:mm

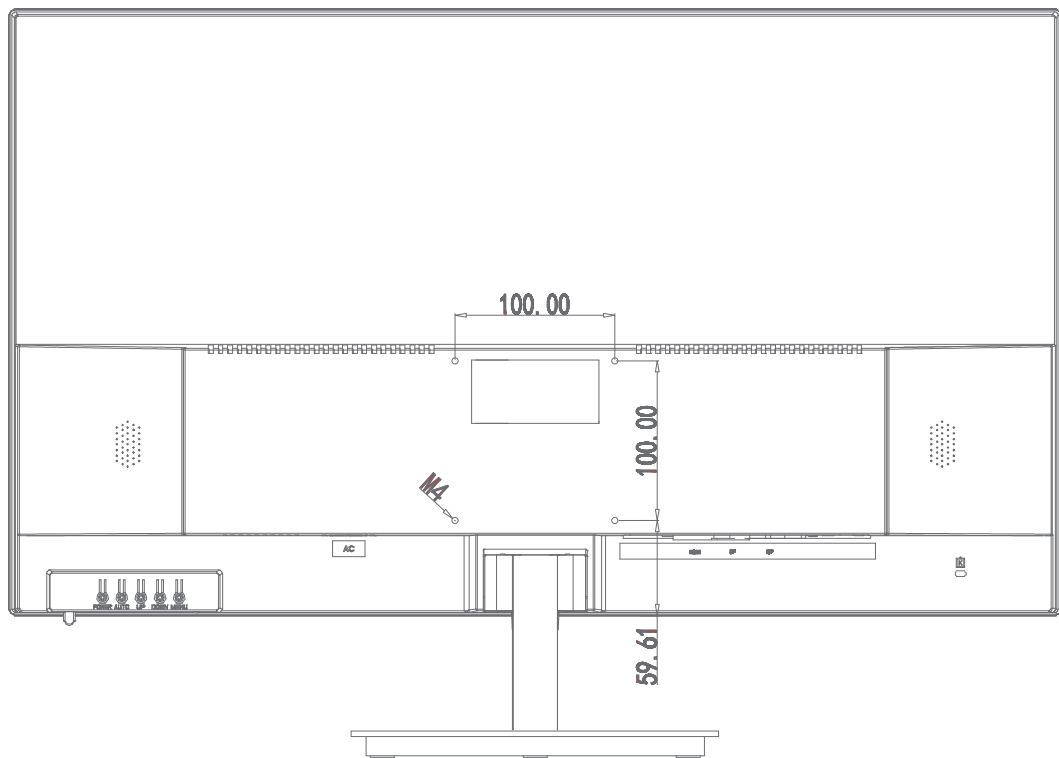

All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.