



Built To Run
Continuously



Product Features

- 4K HD Solution
- Industrial-grade LED screen, suitable for 24x7 CCTV Applications
- High brightness, High contrast, High definition.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- 5ms fast response time; 178 ° wide viewing angle.
- Metal chassis design, Anti-static, Anti-magnetic field, Anti-interference, no radiation. Easy Menu;
- Convenient Controller.

DNle digital image processing

Dynamic optimization




Natural color



Contrast enhancement



Detail enhancement



Wide Viewing Angles(Up to 178°)



178(H)/178(V)

DISPLAY CHARACTERISTICS

| | |
|--------------------------|---------------------------|
| Mode Name | MON-43H4K-P |
| Screen Size | 43" |
| Active Display Area (mm) | 941.184mm(W)×529.146mm(H) |
| Display Mode | 16:9 |
| LED Type | TFT-LED |
| Resolution | 3840 × 2160 |
| Display Color | 1.073G |
| Pixel Pitch(mm) | 0.294(H)×0.294(V) |
| Brightness(nits) | 350cd/M2 |
| Contrast Ratio | 1000:1 |
| Viewing Angle | 178(H) /178(V) |
| Response Time | 5ms |
| Backlight | LED |

INPUT & OUTPUT

| | |
|----------|--------------|
| HDMI 2.0 | 3 |
| DP | 1 |
| USB | 1 |
| Power | 1 |
| Speaker | 2x3W(Stereo) |

VIDEO


| | |
|-----------------------|--|
| Color System | PAL/NTSC/SECAM |
| OSD Control | Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language.. |
| 3D comb filter | YES |
| Video Noise Reduction | YES |

POWER & Mount Way

| | |
|---------------------|--|
| Power | AC100V~240V,50/60Hz |
| Working Temperature | -30 to +85 |
| Power Consumption | 40W |
| Menu | Chinese/English(other languages supported) |
| Mounting | Stand mount, VESA mount |
| MTBF | 50,000 Hours |

ACCESSORIES

| | |
|----------------------|---|
| INCLUDED ACCESSORIES | Industrial PSU,Screw, Cable holder, Quick start guide |
|----------------------|---|

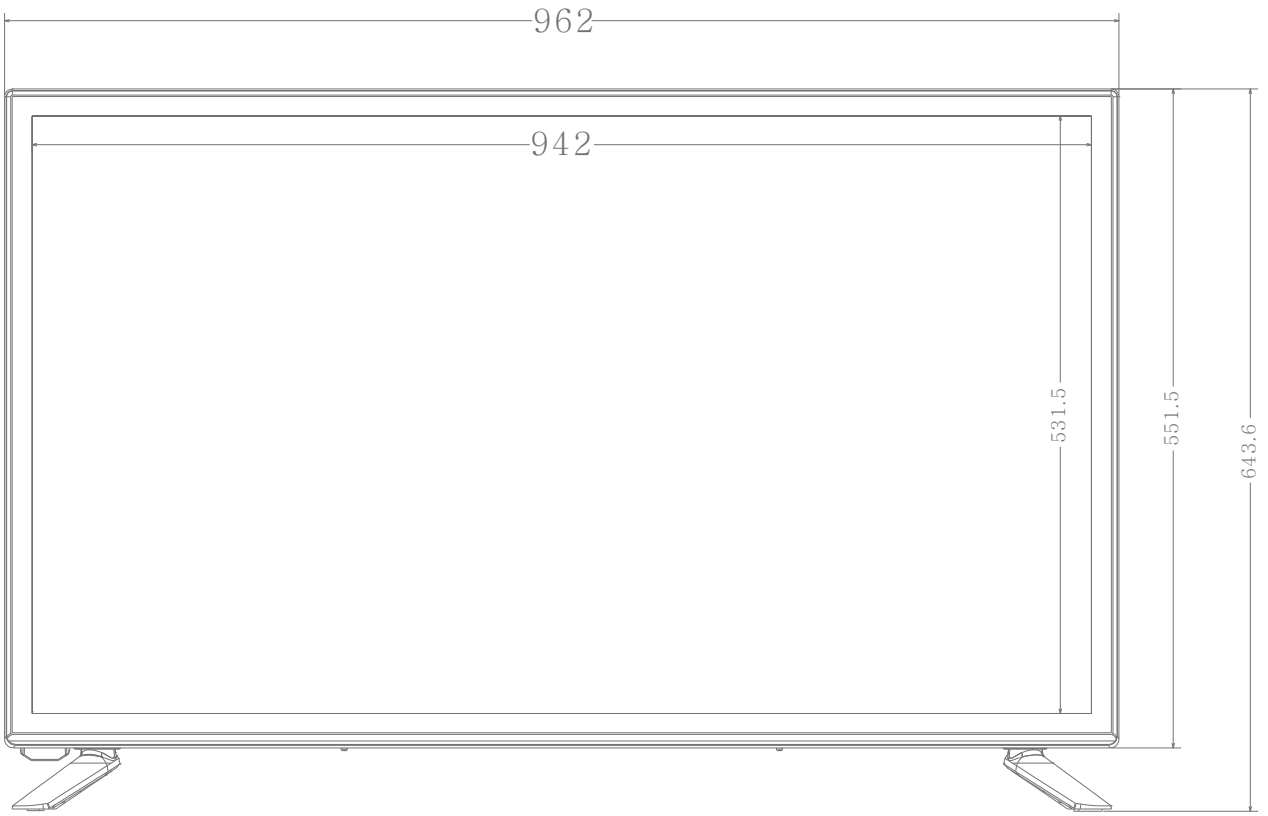

Unit:mm

