


Figure 8 24/020 Cable, White LSZH Jacket w/ Black Stripe

NSZFIG8LSZH

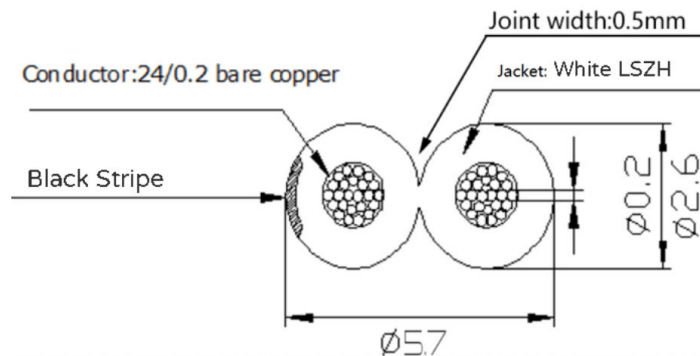

DESCRIPTION

This Figure 8 cable features 24 AWG stranded conductors (20 strands) with a durable white LSZH jacket and a black stripe for easy identification. Its low smoke, zero halogen design ensures enhanced safety, making it ideal for low-voltage applications in environments with strict fire safety requirements.

FEATURES

- Low-voltage figure-8 cable ideal for speakers, security systems, and various other applications
- Each conductor is constructed from 24 strands of 0.20mm² copper wire, yielding a cross-sectional area of 0.75mm².
- White LSZH jacket with black stripe down one side for easy identification.

Cable code	NSZFIG8LSZH100, NSZFIG8LSZH250	
1. Conductor	Material	Plain Annealed Bare Copper, STRANDED
	Construction	24x0.2mm
	Nom. OD	1.13mm
	Cross Section Area	0.75mm ²
	Max. DCR @ 20C	25 ohm / km
2. Jacket	Material	White LSZH, with black stripe on one leg
	Nom. Wall Thickness	0.73mm
	Nom. O.D.	2.60 x 5.70±0.20mm
	Construction	2Cores laid in parallel in figure 8
Voltage Rating	Extra low voltage	
Operating Temp. Range	-40C to 75C	
Packing length	100m or 250m Plastic Reel	
Cable weight	2.9 Kg / 100m, 7.25 Kg / 250m	