

# VT-HD416P

16ch HD-CVI,TVI,AHD Balun Hub



## Features


- Compatible with all HD-CVI,HD-TVI,HD-AHD
- Video up to 450m for 720P CVI Cameras
- Video up to 250m for 1080P CVI Cameras
- Video up to 250m for 720P/1080P TVI Cameras
- Video up to 320m for 720P/ 250m for 1080P AHD Cameras
- NTSC,PAL and SECAM video formats
- 60dB crosstalk and noise immunity
- Compact size and easy installation
- Built-in transient suppression protection
- Save cable cost 30%-50%

## Technical Specification

Frequency response: DC-60MHZ  
Attenuation:0.5dB typ  
CMRR (Common Mode Rejection Ratio): 60DB  
Surge Protection:4KV  
ESD:8KV  
Impedance: BNC: 75Ω ; RJ45:100Ω  
Working temperature: -10°C-70°C  
Storage temperature: -30°C-70°C  
Humidity: 0 to 95%

### Connection Method:

Clamp modular plugs for a Cat-5 unshielded twisted pair wire according to the connection order of TIA/EIA-568B (please refer to the following figure), connect the clamped modular plugs to the RJ45 sockets, connect the coax to the BNC.

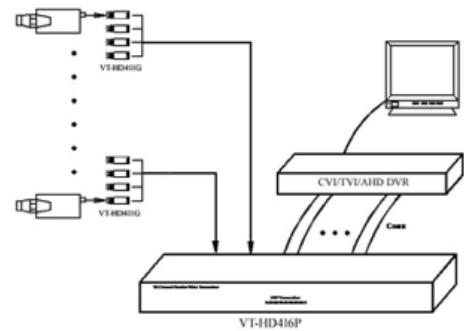

PIN	COLOR
1	W-O
2	W
3	W-O
4	BL
5	W-BL
6	G
7	W-BR
8	BR